

LUBING

UniDos 1, 2 + 3 *The electrical doser*



Highest accuracy
Very easy to handle
Highly resistant against acids

Technical Data

The advantages of UniDos:


- Precise dosage during the desired period
- Adjustable dosing relationship from 0,01 to 15 % (in dependence of the flow rate)
- Measurement and dosage with highest accuracy
- All assigned parameters are constantly controlled
- Very easy to handle
- Additional information: included water counter, works like a water meter including a daily counter indicates the water consumption/day
- High consistent against many acids
- Long-living

Technical data:

Product	3/4"			1 1/4"
	UniDos 1 Art. 4251	UniDos 2 Art. 4252	UniDos 3 Art. 4253	UniDos 3 Art. 4253-4
Adjustable dosage	0,01 - 15%	0,01 - 15%	0,01 - 15%	0,01 - 15%
Flow-rate-range	15-2400 l/h	15-2400 l/h	15-2400 l/h	240-9600 l/h
Maximum supply capacity of the pumps	12 l/h	24 l/h	90 l/h	90 l/h
Mixing ratio at 600 l/h*	2%	4%	15%	15%
Operating pressure	0-4 bar	0-4 bar	0-4 bar	0-4 bar
Weight	9,45 kg	11,55 kg	16 kg	23 kg
Empty alarm unit	Yes	Yes	Yes	Yes
Batch dosing	Yes	Yes	Yes	Yes
Dosing timer	Yes	Yes	Yes	Yes
Water counter	Yes	Yes	Yes	Yes

* see on the table

UniDos 1, 2 and 3 at the dosing comparison:

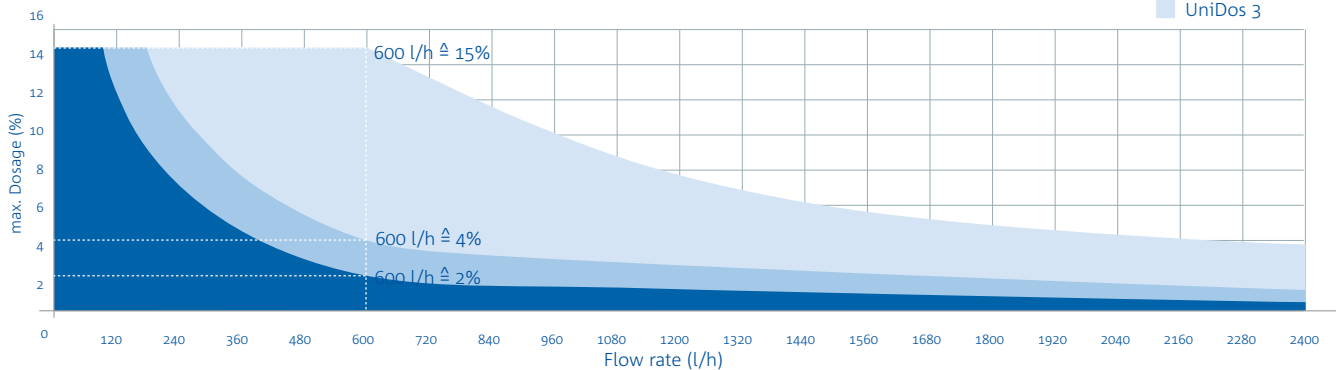

For further information: www.lubing.com

Technical modifications reserved.

LUBING

Drinking-Systems
Conveyor-Systems
Climate-Systems

LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf (Germany)

Tel.: +49 (0) 54 42 - 98 79-0 · Fax: +49 (0) 54 42 - 98 79-33

www.lubing.com · info@lubing.com