


Brooder guard for rearing

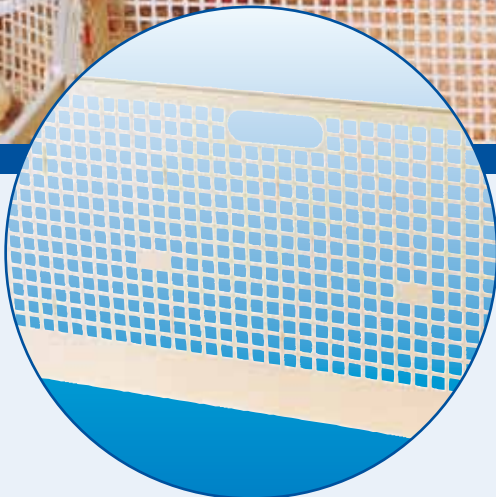

Brooder guard for rearing

The LUBING brooder guard, Art. 4510-09, made of plastic, will be put together to rings for rearing.

With the connecting hinges, Art. No. 4512-09, the single brooder guards will be joined together at the top and at the bottom for easy steady standing and dismantling. The light plastic sections (800 x 400 mm) can easily be assembled and dismantled by one person. The complete ring can be

transported with the handle. Slots for floor-watering-lines can be easily cut with a knife at the perforated separation-marks. For tightening up and stabilization, the stabilizer, Art. No. 4511-09, will be moved to the upper edge. Therefore, the brooder guard will be stabilized at the slots.

The size of the brooder guard rings can be extended without problems.




The limited views calm the animals

down and the gripshape guarantees air circulation. After cleaning, the brooder guard is nearly unlimited re-usable.


Diameter Ø	3,5 m	4,5 m
Sections	12	18
birds/ring	approx. 280	approx. 380



Connection hinges
Art. 4512-09

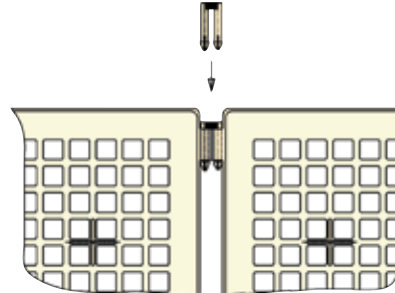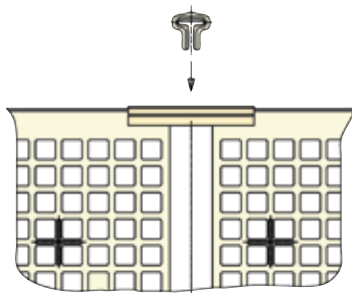

Stabilizer
Art. 4511-09

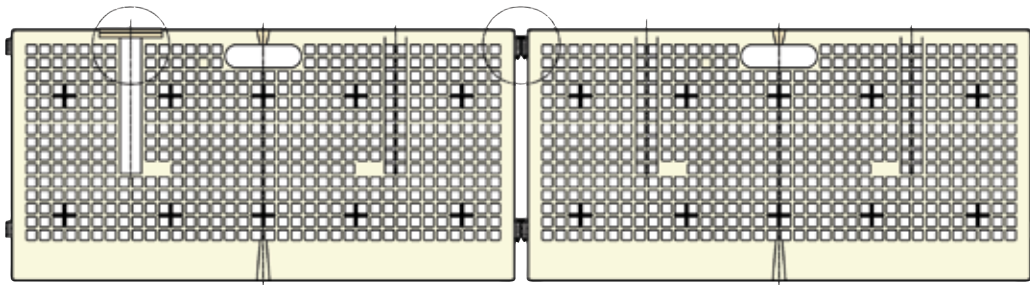

Brooder guard Art. 4510-09

For further information: www.lubing.com

Technical modifications reserved.

LUBING



Drinking-Systems
Conveyor-Systems
Climate-Systems

LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf (Germany) · Tel.: +49 (0) 54 42 - 98 79-0

Fax: +49 (0) 54 42 - 98 79-33 · Internet: www.lubing.com

email: info@lubing.com