


## Main facts at a glance



	Rearing (30-40 birds/drinker)* hen finishing (25-30 birds/drinker)*		Tom finishing (approx. 20 birds/drinker)*	
drinkers per element	open pendulum	closed pendulum	open pendulum	closed pendulum
3	Art. 4084	Art. 4084-1	Art. 4087	Art. 4087-1
4	Art. 4085	Art. 4085-1	Art. 4088	Art. 4088-1
5	Art. 4086	Art. 4086-1	Art. 4089	Art. 4089-1
Layout	Turkey rearing: 2 drinking lines in the ring preferably in major distance from heater. Hen finishing: 1 drinking line per feeding line.		Tom finishing: 1 drinking line per feeding line.	

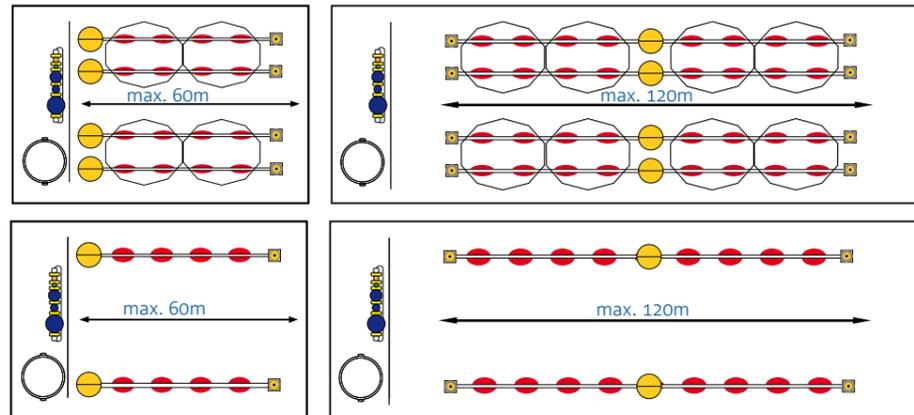

Rearing

Finishing

Pressure regulator	Front connection (Sketch on left)	max. length of line (m)	Middle connection (Sketch on right)	max. length of line (m)
	Art. 3211-9-00	60 **	Art. 3216-9-00	120 **

\* The number of animals per nipple has to be reduced in hot climates and in dependence of the light-/waterprogramme!

Pay attention to national / regional regulations!

\*\* While using the light-/waterprogramme the length of line has to be reduced by 1/3.

For further information: [www.lubing.com](http://www.lubing.com)

Technical modifications reserved.

## Floor-watering system “EasyLine” for Turkey rearing and finishing



# LUBING



Drinking-Systems  
Conveyor-Systems  
Climate-Systems

LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf (Germany)

Tel.: +49 (0) 54 42 - 98 79-0 · Fax: +49 (0) 54 42 - 98 79-33

[www.lubing.com](http://www.lubing.com) · [info@lubing.com](mailto:info@lubing.com)

04-10 / 0819-1 / 1000

with the  
**Turkey-nipple Art. 4070**

# Floor-watering system "EasyLine" for turkey rearing and finishing

The LUBING Floor-watering system for turkeys consists of the following elements:

1. Water supply
2. Drinking elements
3. Breather unit
4. Suspension

## 1. Water supply

The Main water supply secures an optimum water quality for a long service life of the nipple drinkers. The water should have the quality of drinking water. At any case the water must be filtered.

The water runs from the Main water supply through the Pressure regulator with integrated flush system into the drinking lines. The Pressure regulator is available for front or middle-installations.

## 2. Drinking Elements

The drinking lines are supplied in assembled elements of 3m length. These elements are to be coupled to the length of the house.

## 3. Breather Unit

At the end of each drinking line a flush breather unit is installed. All valves of the breather units close during the flushing, which could be started by hand or alternatively by the automatic flush system.

## 4. Suspension

The drinking lines are suspended by hangers, which are stuck on the aluminium profiles every 3 m. These hangers are connected with a suspension cable via ceiling pulleys with the central hoisting cable.

The drinking line can be adjusted to the desired height by Hand winch or Ceiling winch and can be winched up easily to the ceiling for emptying or cleaning.

### Main water supply

Optimum water quality increases the service life of the drinking systems. The Medicator works without energy for the supplement of vitamins or medicines.



### Hand winch

The right height adjustment will be done trouble-free by the hand or the ceiling winch.




### Pressure regulator

Pressure regulator with integrated flush system. With the Pressure regulator the water column can be adjusted as needed.



### Mount protection

The LUBING Shocker wire, electrical, for the use with a conventional main fencer.

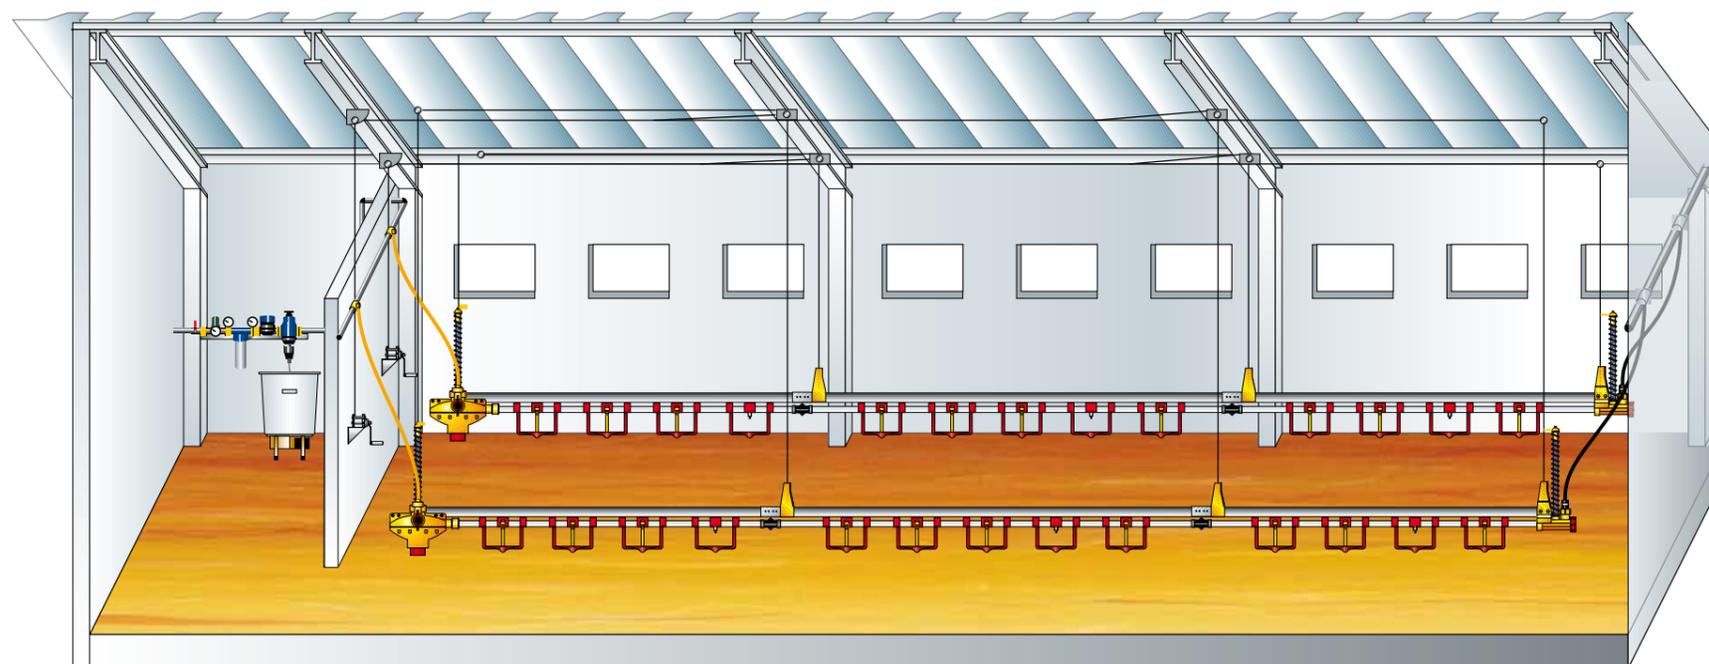

### The principle of the pendulum

The pendulum gets directed with the head of the animal at every absorption of water. In the open version of the pendulum (25 mm starter ball) the water flows from the 28 mm square pipe down the inside of the pendulum into the cup (image above). In the closed version (30 mm starter ball) the water flows down the outside of the pendulum into the cup (image below). The rim of the cup is cleaned by the wattles and neck feathers of the birds at every drinking session. Therefore the optimal height for the animals is necessary.



### Mixer

In the Mixer additives, e.g. vitamins or medicines, are stirred permanently while being added to the drinking water.



### Rearing cup

For low losses during the first days use the LUBING Starterballs. These secure a sufficient water level in the cups like a ball valve.



### Finishing cup

The Finishing cup is designed for the tom finishing. This big round cup is more stable and catches easily the water spillage.



### Flush breather

The Flush breather unit at the end of each drinking line works, e.g. with the LUBING Flush controller, automatically. For flushing is no additional handling necessary.

### Perfect water supply

The central element of the floor-watering system is the Turkey-Nipple Art. 4070. The combination of the pendulum and the different stainless steel reinforced Drip cups ensures a dry manure and best results for the rearing and fattening for every age of the turkey.