


LUBING

DIRT REMOVAL BELT FOR CONVEYOR SYSTEMS

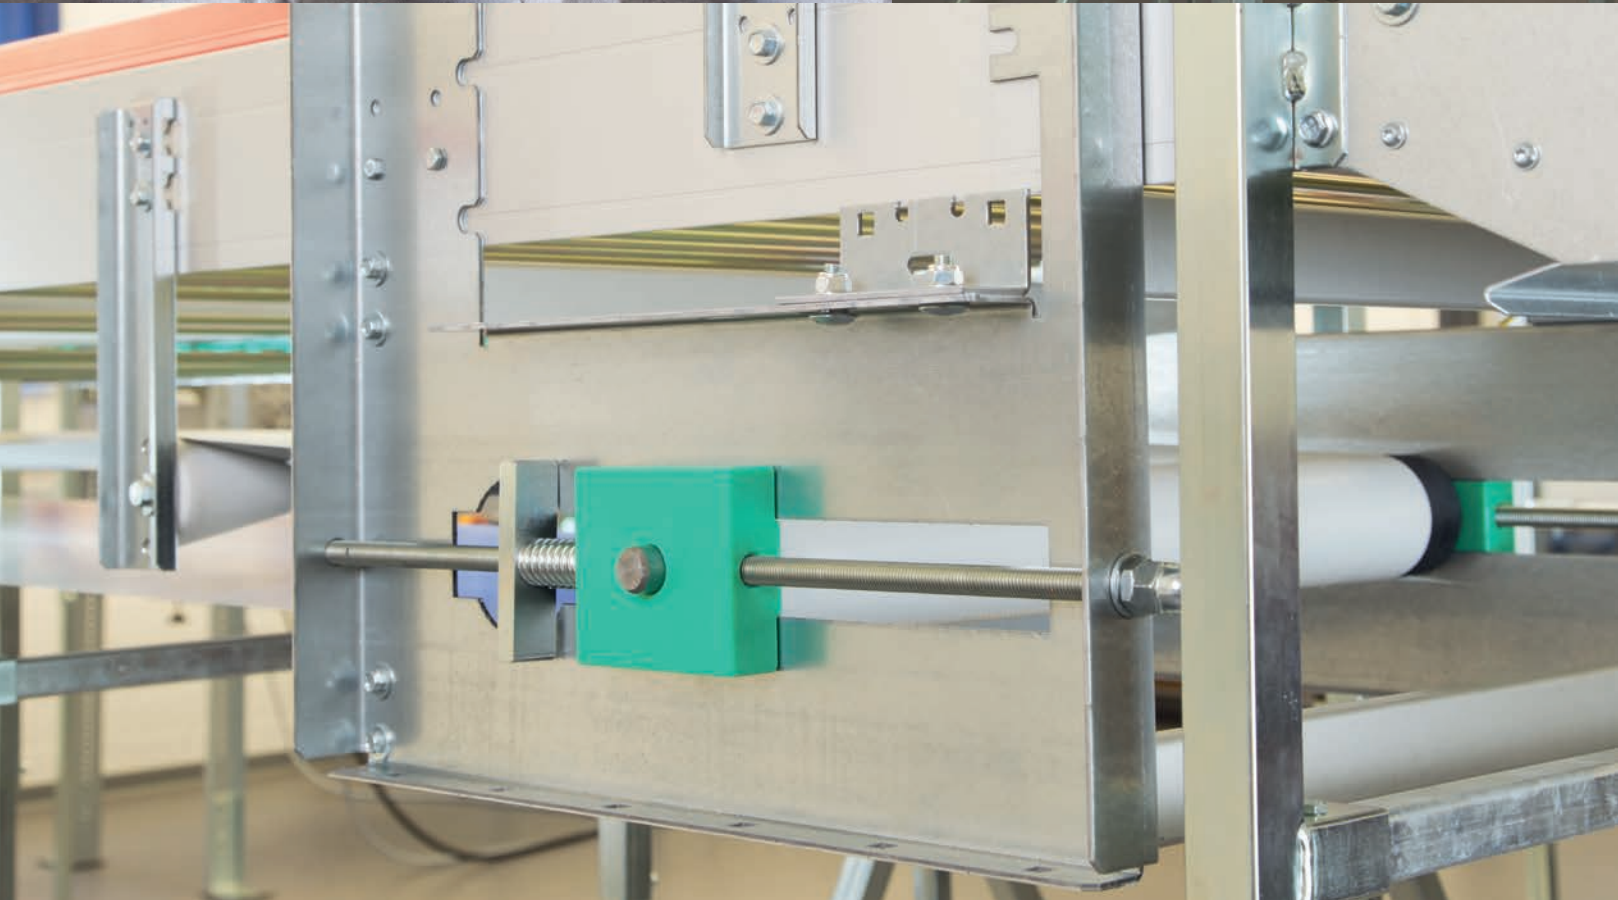


ADVANTAGES OF THE LUBING DIRT REMOVAL BELT

- Dirt and soft-shell eggs are collected under the LUBING conveyor system. This avoids time-consuming cleaning of the floor or even the dirt collection plates in the conveyor system.
- Conveys the soft-shell eggs to the drive side so that they are discharged at a defined point by the integrated scraper.
- Can be installed on new and existing conveyors with little effort.
- Improves hygiene in the conveyor area.

DESIGN

| Assemblies | Type | | |
|------------------------------|--------------------|--------------------|--------------------|
| | 350 | 500 | 750 |
| Drive unit | Art. 187 006 20 00 | Art. 185 006 20 00 | Art. 188 006 20 00 |
| Holder for dirt removal belt | Art. 187 700 04 00 | Art. 185 700 04 00 | Art. 188 700 04 00 |
| End units | Art. 187 006 24 00 | Art. 185 006 24 00 | Art. 188 006 24 00 |
| Plastic fabric belt | Art. 75 02 013 | Art. 75 02 011 | Art. 75 02 012 |
| Motor 0,18 kW | Art. 50 03 012 | Art. 50 03 012 | Art. 50 03 012 |

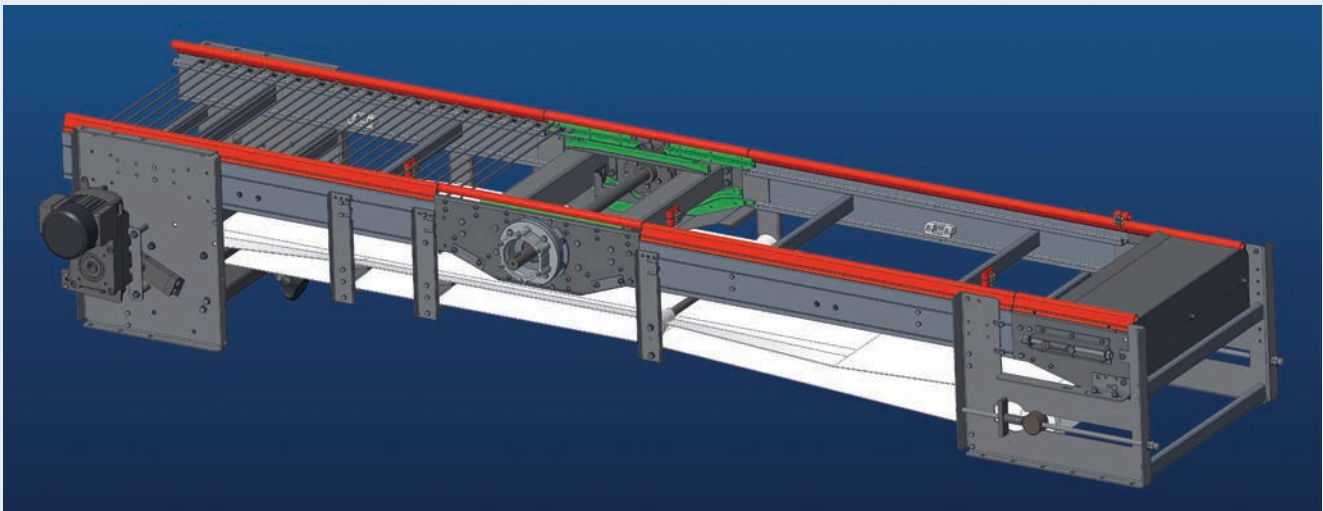

The dirt removal belt for the curve conveyor consists of the drive unit as well as the holders for the plastic fabric belt and the end unit.
The belt speed of the dirt belt is 3.9 m /min.

Special voltages on request.

LUBING

Further information under
WWW.LUBING.COM

LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf

☎ +49(0)54 42 - 98 79-0

☎ +49(0)54 42 - 98 79-33

www.lubing.com · info@lubing.com

0891-1/22-04 · Subject to
technical changes.